



fry top smooth 7,16 kW

G6I200G



G61200G

Short Form Specification

Name:		
Item:		
Model:		

Main Features

- Stainless steel body
- Easy to clean and hygenic
- Safety gas valve
- Ergonomic design
- · Adjustable legs
- Long life
- High efficiency burner
- Homongenous cooking surface
- Avaible LPG or natural gas

Prodcut Highlighting Detaist

- Smooth, ribbed and ½ smooth + ½ ribbed fry top plates versions
- ST 52 steel or hard chromium coated steel 15 mm thick griddle plate
- Cooking surface perimeter is 3 mm thick stainless steel
- Slightly sloped cooking surface, easy and convenient for cleaning, with liquid discharge hole.
- Homogenous heated cooking surface
- Special machined grooves
- Waste oil drawer
- Thermostatic temperature control
- Thermocouple safety device connected to the hurner
- Piezo-electric burner ignition
- Insulation to prevent overheating of the body and reduce energy losses
- Operating temperature range (50-300 ° C)


APPROVAL.





fry top smooth 7,16 kW

G61200G

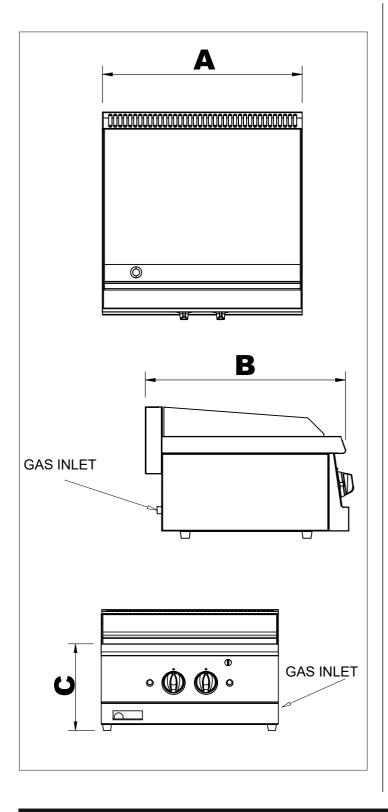

Code	G6l200G	
Width (A)	600	
Dept (B)	600	
Hight (C)	300	
Gas Inlet	R 1/2"	
Power	7,16 kW	
Weight (kg)	51,5	
Volume (m³)	0,28	

