

## Two doors banquet trolleyes 2 Kw GBA200H



**Short From Specification** 

Name:			
Item:			
Model:			

## **General Features**


- The convection-heated banquet trolleys can be used dry or with moist air, depending on what is best for your
- Digital control with cabinet temperature display and setting. Fully compliant HACCP digital controls include visible alarms.
- Large storage area suitable to contain 2/1 GN containers or shelves on anti-tilt pressed runners.
- Optimized bottom to up forced air flow provide even temperature distribution and fast heating in any conditions.
- Cabinet fitted with up to 40 mm thickness of polyurethane insulation for best insulating performance with 100% environmental protection.
- Removable triple-chamber balloon magnetic gasket to improve insulation consumption.
- Spacers on the sides-end ensure that the convection air in the interior of the banquet trolley can circulate all around, achieving temperature distribution which is as even as possible.
- The slide-in convection-heated module can be removed particularly easily.
- The water tank for the moist-air heating can also be removed conveniently.
- Gn can be manually filled with water.
- The heat can be monitored and adjusted between 50 80 °C with the thermeter.
- Dashpot dampers project the unit againts damages.
- Two wheels with brakes and two without.

## Construction





## **Two doors banquet trolleyes** 2 Kw GBA200H

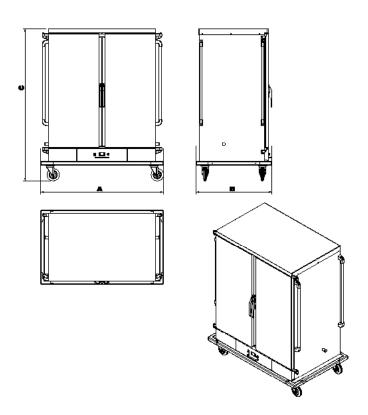

Kod-Code	GBA200H		
Genişlik - Widht (A)	1498		
Derinllik - Dept (B)	928		
Yükseklik - Hight (C)	1905		
Tepsi Kapasite - Try Capacity	36 Pcs Gn 2/1x65 72 Pcs Gn 1/1x65		
Elektrik Giriş - Electrical Inlet	230 V N PE		
Güç - Power	2 KW		
Ağırlık- Weight (kg)	253		
Hacim - Volume (m3)	2,68		

